


66 – T2 CORE BARREL

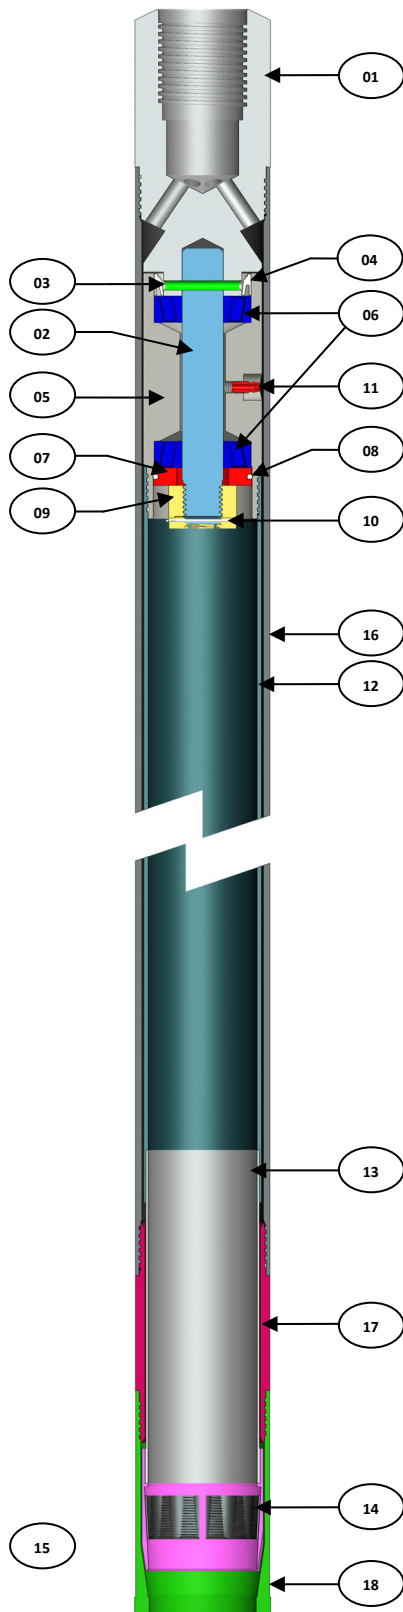


	ITEM DESCRIPTION	PART NUMBERS
1-18	66 – T2 CORE BARREL ASSEMBLY 3.0 M	50-00-100
1-18	66 – T2 CORE BARREL ASSEMBLY 1.5 M	50-00-110
1-11	66 – T2 HEAD ASSEMBLY	50-00-200
01	HEAD	50-01-001
02	SPINDLE	50-01-002
03	SPRING DOWELL	50-01-003
04	OIL SEAL	50-01-004
05	BEARING HOUSING	50-01-005
06	TAPER ROLLER BEARINGS - 2 NOS.	50-01-006
07	WASHER	50-01-007
08	O - RING	50-01-008
09	CASTLE NUT	50-01-009
10	COTTER PIN	50-01-010
11	GREASE FITTING	16-03-024
12	INNER TUBE 3.0 M	50-03-001
12	INNER TUBE 1.5 M	50-03-002
13	INNER TUBE EXTENTION	50-03-003
14	CORE LIFTER	50-03-004
15	CORE LIFTER CASE	50-03-005
16	OUTER TUBE 3.0 M	50-02-001
16	OUTER TUBE 1.5 M	50-02-002
17	BLANK REAMING SHELL	50-02-003
18	BIT BLANK	50-02-004

ALL AMKO CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD AMKO CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY , WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.

76 – T2 CORE BARREL

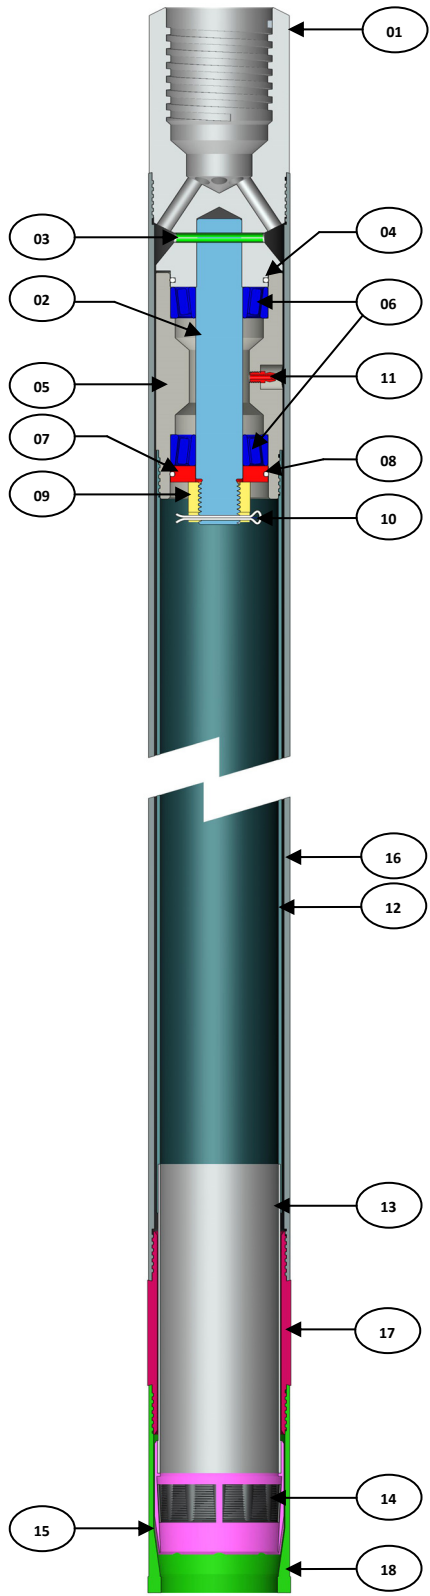


	ITEM DESCRIPTION	PART NUMBERS
1-18	76 – T2 CORE BARREL ASSEMBLY 3.0 M	52-00-100
1-18	76 – T2 CORE BARREL ASSEMBLY 1.5 M	52-00-110
1-11	76 – T2 HEAD ASSEMBLY	52-00-200
01	HEAD	52-01-001
02	SPINDLE	52-01-002
03	SPRING DOWELL	52-01-003
04	O - RING	52-01-004
05	BEARING HOUSING	52-01-005
06	TAPER ROLLER BEARINGS - 2 NOS.	52-01-006
07	WASHER	52-01-007
08	O - RING	52-01-008
09	CASTLE NUT	52-01-009
10	COTTER PIN	52-01-010
11	GREASE FITTING	16-03-024
12	INNER TUBE 3.0 M	52-03-001
12	INNER TUBE 1.5 M	52-03-002
13	INNER TUBE EXTENTION	52-03-003
14	CORE LIFTER	52-03-004
15	CORE LIFTER CASE	52-03-005
16	OUTER TUBE 3.0 M	52-02-001
16	OUTER TUBE 1.5 M	52-02-002
17	BLANK REAMING SHELL	52-02-003
18	BIT BLANK	52-02-004

ALL AMKO CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD AMKO CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY , WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.

86 – T2 CORE BARREL

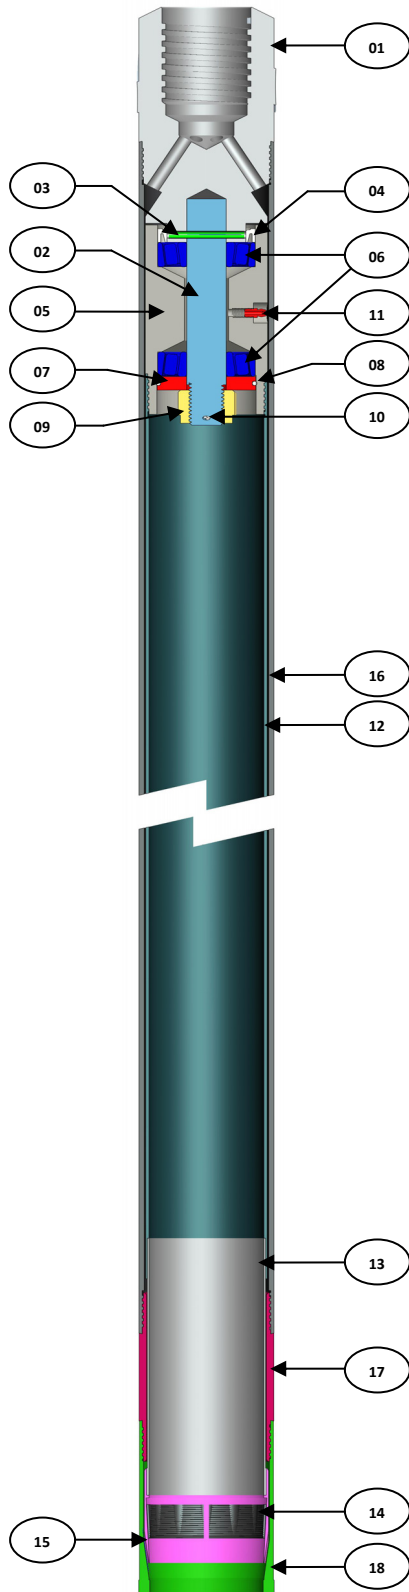


	ITEM DESCRIPTION	PART NUMBERS
1-18	86 – T2 CORE BARREL ASSEMBLY 3.0 M	54-00-100
1-18	86 – T2 CORE BARREL ASSEMBLY 1.5 M	54-00-110
1-11	86 – T2 HEAD ASSEMBLY	54-00-200
01	HEAD	54-01-001
02	SPINDLE	54-01-002
03	SPRING DOWELL	54-01-003
04	OIL SEAL	54-01-004
05	BEARING HOUSING	54-01-005
06	TAPER ROLLER BEARINGS - 2 NOS.	54-01-006
07	WASHER	54-01-007
08	O - RING	54-01-008
09	CASTLE NUT	54-01-009
10	COTTER PIN	54-01-010
11	GREASE FITTING	16-03-024
12	INNER TUBE 3.0 M	54-03-001
12	INNER TUBE 1.5 M	54-03-002
13	INNER TUBE EXTENTION	54-03-003
14	CORE LIFTER	54-03-004
15	CORE LIFTER CASE	54-03-005
16	OUTER TUBE 3.0 M	54-02-001
16	OUTER TUBE 1.5 M	54-02-002
17	BLANK REAMING SHELL	54-02-003
18	BIT BLANK	54-02-004

ALL AMKO CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD AMKO CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY , WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.

101 – T2 CORE BARREL

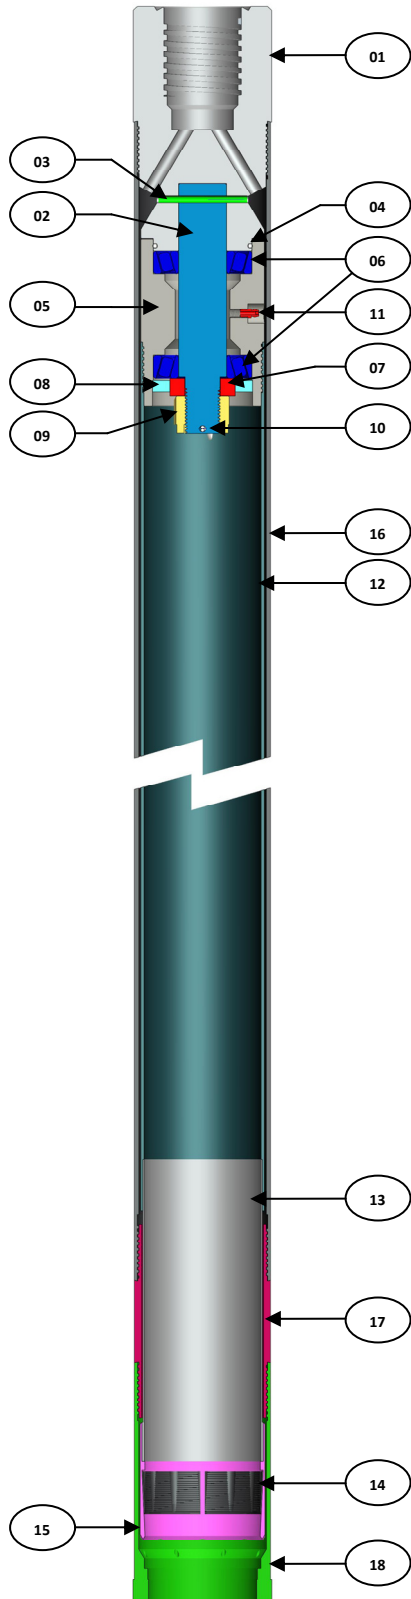

	ITEM DESCRIPTION	PART NUMBERS
1-18	101 – T2 CORE BARREL ASSEMBLY 3.0 M	56-00-100
1-18	101– T2 CORE BARREL ASSEMBLY 1.5 M	56-00-110
1-11	101 – T2 HEAD ASSEMBLY	56-00-200
01	HEAD	56-01-001
02	SPINDLE	56-01-002
03	SPRING DOWELL	56-01-003
04	O - RING	56-01-004
05	BEARING HOUSING	56-01-005
06	TAPER ROLLER BEARINGS - 2 NOS.	56-01-006
07	BUSH	56-01-007
08	OIL SEAL	56-01-008
09	CASTLE NUT	56-01-009
10	COTTER PIN	56-01-010
11	GREASE FITTING	16-03-024
12	INNER TUBE 3.0 M	56-03-001
12	INNER TUBE 1.5 M	56-03-002
13	INNER TUBE EXTENTION	56-03-003
14	CORE LIFTER	56-03-004
15	CORE LIFTER CASE	56-03-005
16	OUTER TUBE 3.0 M	56-02-001
16	OUTER TUBE 1.5 M	56-02-002
17	BLANK REAMING SHELL	56-02-003
18	BIT BLANK	56-02-004

ALL AMKO CORE BARRELS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES AND STRAIGHTNESS BETTER THAN 1 : 2000 .

STANDARD AMKO CORE BARRELS HAVE HEAT TREATED ALLOY STEEL HEADS WHICH COME WITH HARD METAL STRIPS ON THE DIAMETER OF THE HEAD WHICH ARE 60 Rc TO 65 Rc .

OPTIONALLY , WE ALSO SUPPLY STANDARD CORE BARRELS WITH 18" LONG HARD CHROME PLATING AT BOTH ENDS OF THE OUTER TUBE AT EXTRA COST. THIS INCREASES THE LIFE OF THE OUTER TUBE EXPONENTIALLY.