




WIRELINE HEAT TREATED AND INDUCTION HARDENED DRILL ROD

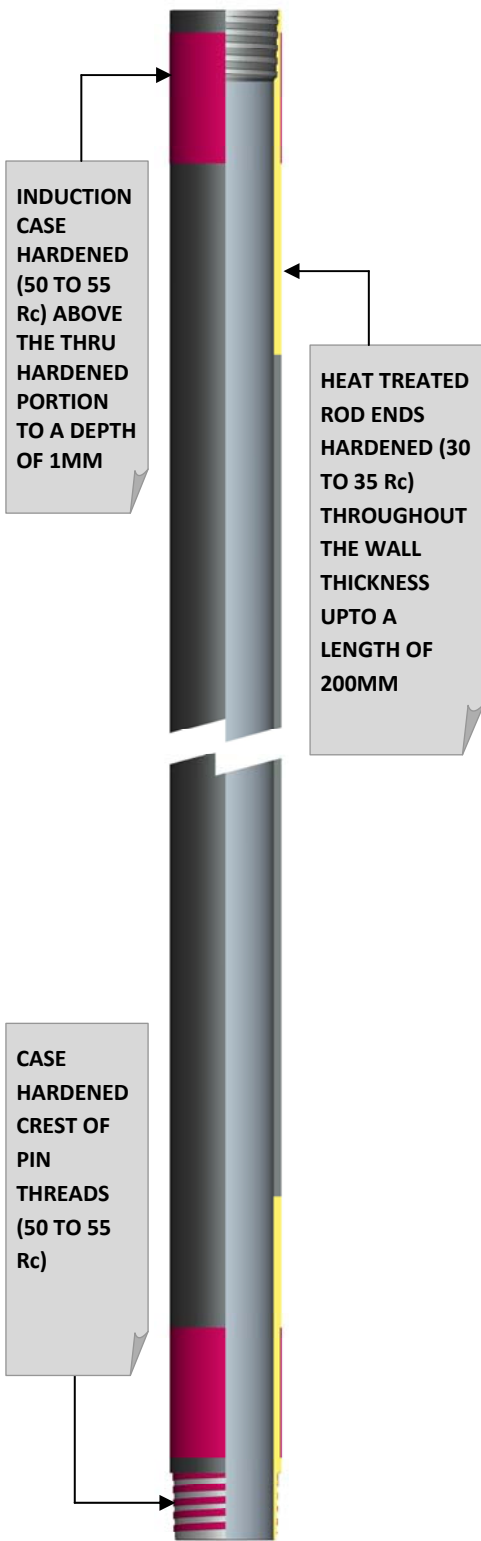

SIZE	LENGTH	O.D.	I.D.	T.P.I	WEIGHT KGS	PART NUMBERS
AWL	1.5M	44.5	34.9	4	7.1	K4-01-001
AWL	3.0M	44.5	34.9	4	14.2	K4-01-002
AT	1.5M	44.5	34.9	2.5	7.1	K4-01-003
AT	3.0M	44.5	34.9	2.5	14.2	K4-01-004
BWL	1.5M	55.6	46	3	9.4	K4-02-001
BWL	3.0M	55.6	46	3	18.6	K4-02-002
BT	1.5M	55.6	46	2.5	9.4	K4-02-003
BT	3.0M	55.6	46	2.5	18.6	K4-02-004
NWL	1.5M	69.9	60.3	3	12	K4-03-001
NWL	3.0M	69.9	60.3	3	23.5	K4-03-002
NT	1.5M	69.9	60.3	2	12.1	K4-03-003
NT	3.0M	69.9	60.3	2	23.6	K4-03-004
HWL	1.5M	88.9	77.8	3	18	K4-04-001
HWL	3.0M	88.9	77.8	3	34.9	K4-04-002
HT	1.5M	88.9	77.8	2	18.2	K4-04-003
HT	3.0M	88.9	77.8	2	35.2	K4-04-004
PWL	1.5M	114.3	101.6	3	28	K4-05-001
PWL	3.0M	114.3	101.6	3	52.5	K4-05-002
PHD	1.5M	114.3	101.6	2.5	28.2	K4-05-003
PHD	3.0M	114.3	101.6	2.5	53	K4-05-004

AMKO WIRELINE DRILL RODS ARE COMPLETELY INTERCHANGEABLE WITH CORRESPONDING ROD SIZES OF ' Q ' SERIES.

ALL AMKO WIRELINE DRILL RODS ARE MANUFACTURED FROM THE HIGHEST QUALITY RAW MATERIALS i.e. COLD DRAWN SEAMLESS TUBES OF GRADE SAE 1541 / SAE 4130 / SAE 5130 THAT ARE IMPORTED . THESE HAVE EXTREMELY HIGH MECHANICAL PROPERTIES FOR MID BODY AND STRAIGHTNESS BETTER THAN 1: 5000.