



**DTH DRILL RODS**



PIPE DIA	API THREAD	WALL THICKNESS	LENGTH	PART NUMBERS
76.2	2 3/8" REG	4.0	1000	93-00-001
76.2	2 3/8" REG	4.0	1500	93-00-002
76.2	2 3/8" REG	4.0	2000	93-00-003
76.2	2 3/8" REG	4.0	3000	93-00-004
76.2	2 3/8" REG	6.3	1000	93-00-005
76.2	2 3/8" REG	6.3	1500	93-00-006
76.2	2 3/8" REG	6.3	2000	93-00-007
76.2	2 3/8" REG	6.3	3000	93-00-008

PIPE DIA	API THREAD	WALL THICKNESS	LENGTH	PART NUMBERS
88.9	2 3/8" REG	4.0	1000	93-00-009
88.9	2 3/8" REG	4.0	1500	93-00-010
88.9	2 3/8" REG	4.0	2000	93-00-011
88.9	2 3/8" REG	4.0	3000	93-00-012
88.9	2 3/8" REG	6.3	1000	93-00-013
88.9	2 3/8" REG	6.3	1500	93-00-014
88.9	2 3/8" REG	6.3	2000	93-00-015
88.9	2 3/8" REG	6.3	3000	93-00-016

ALL AMKO DTH DRILL PIPES ARE MANUFACTURED FROM SEAMLESS CARBON STEEL TUBES , WHICH HAVE EXTREMELY HIGH MECHANICAL PROPERTIES. THE STRAIGHTNESS OF THE TUBES ARE BETTER THAN 1 IN 2000 MM.


THE COUPLERS ARE MANUFACTURED FROM HIGH QUALITY ALLOY STEEL AND ARE HEAT TREATED IN ORDER TO ATTAIN VERY HIGH MECHANICAL PROPERTIES AND WEAR RESISTANCE.

THE COUPLERS ARE JOINED TO THE PIPE USING AMKO'S PROPRIETARY METHOD, WHICH ENABLES THE COUPLERS TO RUN DEAD THROUGH WITH THE PIPE . THE WELDING IS CARRIED OUT IN A CONTROLLED ENVIRONMENT TO GIVE MAXIMUM STRENGTH.

UNLIKE FRICTION WELDED DTH DRILL PIPES WHICH ARE PRONE TO BREAKAGE AT THE WELD JOINT.



**DTH DRILL RODS**

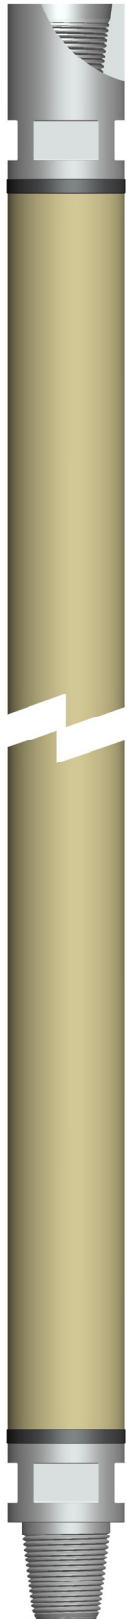

PIPE DIA	API THREAD	WALL THICKNESS	LENGTH	PART NUMBERS
88.9	2 7/8" REG	4.0	1000	93-00-001
88.9	2 7/8" REG	4.0	1500	93-00-002
88.9	2 7/8" REG	4.0	2000	93-00-003
88.9	2 7/8" REG	4.0	3000	93-00-004
88.9	2 7/8" REG	6.3	1000	93-00-005
88.9	2 7/8" REG	6.3	1500	93-00-006
88.9	2 7/8" REG	6.3	2000	93-00-007
88.9	2 7/8" REG	6.3	3000	93-00-008

PIPE DIA	API THREAD	WALL THICKNESS	LENGTH	PART NUMBERS
114.3	3 1/2" REG	6.3	1000	93-00-009
114.3	3 1/2" REG	6.3	1500	93-00-010
114.3	3 1/2" REG	6.3	2000	93-00-011
114.3	3 1/2" REG	6.3	3000	93-00-012
114.3	3 1/2" REG	8.0	1000	93-00-013
114.3	3 1/2" REG	8.0	1500	93-00-014
114.3	3 1/2" REG	8.0	2000	93-00-015
114.3	3 1/2" REG	8.0	3000	93-00-016

ALL KUVAWALA DTH DRILL PIPES ARE MANUFACTURED FROM SEAMLESS CARBON STEEL TUBES , WHICH HAVE EXTREMELY HIGH MECHANICAL PROPERTIES. THE STRAIGHTNESS OF THE TUBES ARE BETTER THAN 1 IN 2000 MM.


THE COUPLERS ARE MANUFACTURED FROM HIGH QUALITY ALLOY STEEL AND ARE HEAT TREATED IN ORDER TO ATTAIN VERY HIGH MECHANICAL PROPERTIES AND WEAR RESISTANCE.

THE COUPLERS ARE JOINED TO THE PIPE USING KUVAWALA'S PROPRIETARY METHOD, WHICH ENABLES THE COUPLERS TO RUN DEAD THROUGH WITH THE PIPE . THE WELDING IS CARRIED OUT IN A CONTROLLED ENVIRONMENT TO GIVE MAXIMUM STRENGTH.

UNLIKE FRICTION WELDED DTH DRILL PIPES WHICH ARE PRONE TO BREAKAGE AT THE WELD JOINT.



## DTH DRILL RODS

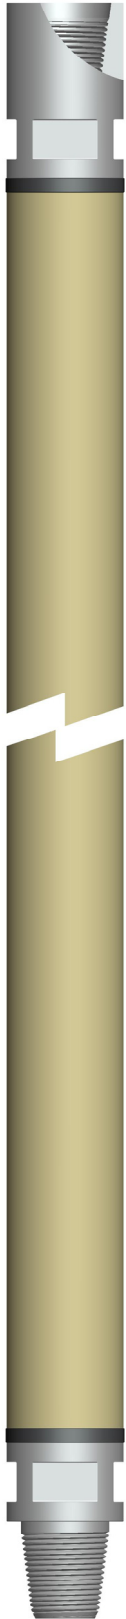

PIPE DIA	API THREAD	WALL THICKNESS	LENGTH	PART NUMBERS
139.7	3 1/2" REG	7.25	1000	93-00-001
139.7	3 1/2" REG	7.25	1500	93-00-002
139.7	3 1/2" REG	7.25	2000	93-00-003
139.7	3 1/2" REG	7.25	3000	93-00-004
139.7	4 1/2" REG	7.25	1000	93-00-005
139.7	4 1/2" REG	7.25	1500	93-00-006
139.7	4 1/2" REG	7.25	2000	93-00-007
139.7	4 1/2" REG	7.25	3000	93-00-008

ALL AMKO DTH DRILL PIPES ARE MANUFACTURED FROM SEAMLESS CARBON STEEL TUBES , WHICH HAVE EXTREMELY HIGH MECHANICAL PROPERTIES. THE STRAIGHTNESS OF THE TUBES ARE BETTER THAN 1 IN 2000 MM.

THE COUPLERS ARE MANUFACTURED FROM HIGH QUALITY ALLOY STEEL AND ARE HEAT TREATED IN ORDER TO ATTAIN VERY HIGH MECHANICAL PROPERTIES AND WEAR RESISTANCE.

THE COUPLERS ARE JOINED TO THE PIPE USING AMKO'S PROPRIETARY METHOD, WHICH ENABLES THE COUPLERS TO RUN DEAD THROUGH WITH THE PIPE . THE WELDING IS CARRIED OUT IN A CONTROLLED ENVIRONMENT TO GIVE MAXIMUM STRENGTH.

UNLIKE FRICTION WELDED DTH DRILL PIPES WHICH ARE PRONE TO BREAKAGE AT THE WELD JOINT.